


MEIKEE PIR Motion Sensor Floodlight

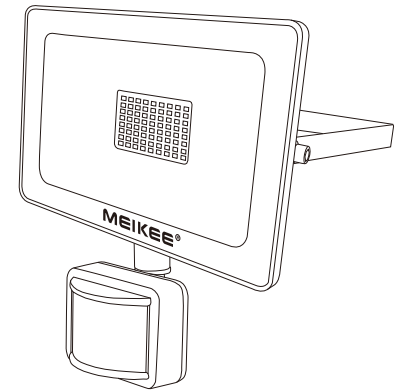


Thank you for purchasing MEIKEE products. To ensure a perfect shopping experience, please follow the instructions for installation and commissioning.

If you have any questions about our products, please contact our customer service, our after-sales team will contact you at the first time, and resolve any questions about the products.

Installation guide


1. Please check the product carefully before installation. If there is any parts damaged or missing, please contact us for a replacement as soon as possible.
2. Install the lamp at a place that can bear the weight of the lamp, and turn off the power before wiring and installation.
3. To ensure the lamps work normally, please match the voltage marked on the lamps.
4. To avoid the hurt caused by the electric leakage of the lamp, please do not remodel the lamp at will.
5. The IP rating of this lamp is IP66, it cannot be immersed in water, otherwise it will stop working and cause electrical leakage.

Dimension




Model	Power	Input voltage			Color temperature	Lumen	Installation height	Lighting range	CRI	IP rating	Ta
		JP	US	EU							
FLB010	10W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	1000	2.5-3.5M	3-4M	>70	IP66	-25-40°C
FLB012	12W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	1200	2.5-3.5M	3-4M	>70	IP66	-25-40°C
FLB015	15W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	1500	2.5-3.5M	3-4M	>70	IP66	-25-40°C
FLB020	20W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	2000	3-5M	3-4M	>70	IP66	-25-40°C
FLB025	25W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	2500	3.5-5M	3-4M	>70	IP66	-25-40°C
FLB030	30W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	3000	3.5-5M	4-6M	>70	IP66	-25-40°C
FLB035	35W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	3500	3.5-5M	4-6M	>70	IP66	-25-40°C
FLB050	50W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	5000	5-7M	6-8M	>70	IP66	-25-40°C
FLB054	54W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	5400	5-7M	6-8M	>70	IP66	-25-40°C
FLB060	60W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	6000	5-7M	6-8M	>70	IP66	-25-40°C
FLB100	100W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	10000	7-10M	10-12M	>70	IP66	-25-40°C
FLB150	150W	100V/60HZ	120V/60HZ	230V/50HZ	3000K/5000K/6500K	15000	10-12M	10-12M	>70	IP66	-25-40°C

Component and structure diagrams

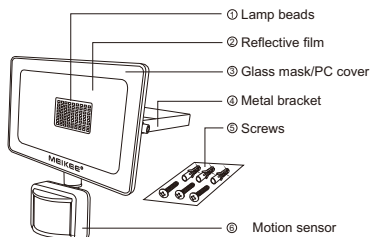


How to install


Step 1 Drill two mounting holes according to the distance of the screw holes on the bracket.

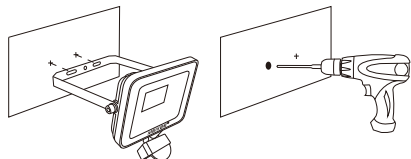


Step 2 Put expansion screws in the prepared mounting holes, then place the bracket in the mounting position and fix with screws.

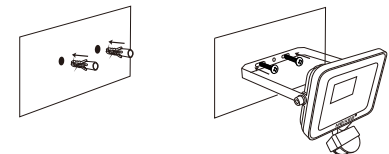





Step 3 Adjust the direction of light and the inspection range of the sensor as needed.

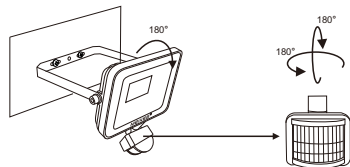

Step 4 Connect the wires.



Step 5 Adjust the TIME, LUX switch at the bottom of the sensor according to actual needs. (Please confirm which sensor you purchased, and then adjust it according to the instructions)

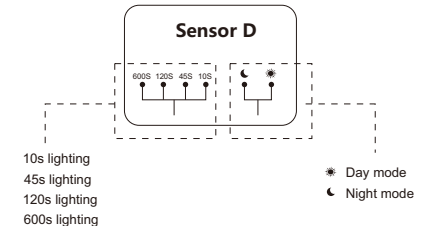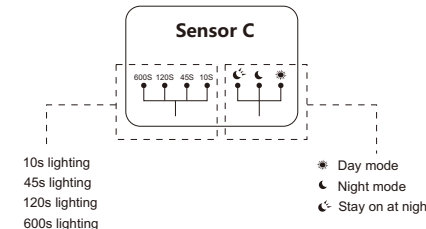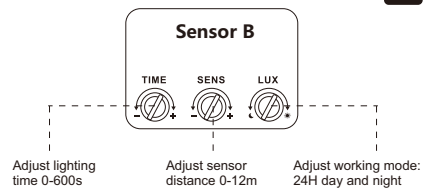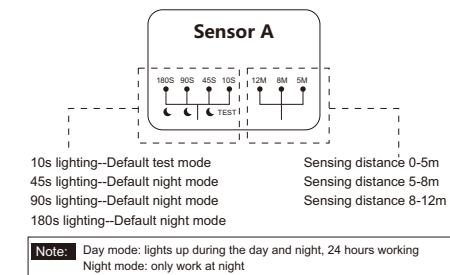

Note: Day mode: lights up during the day and night, that is, working 24 hours
Night mode: work only at night
Stay on at night: Not working during the day, always on at night (unaffected by sensor)

Notification

The detection distance depends on the ambient temperature. If the ambient temperature is close to or higher than the human body temperature, the sensing detection distance will become shorter.

This means you need to get closer to this light. Conversely, if the ambient temperature is lower than the human body temperature, this sensing detection distance will be farther.

Routine maintenance

1. To ensure better lighting, please clean the fixtures regularly.
2. Before maintenance, make sure the power is disconnected.
3. To avoid damage of the lamp, please do not clean it with chemicals.

MEIKEE

EC REP C&E Connection E-Commerce (DE) GmbH
Zum Linnegraben 20, 65933, Frankfurt am Main, Germany
E-mail: info@ce-connection.de Tel: +49 (0)69 27246648

Manufacturer: Shenzhen Oumeike Lighting Technology Co., Ltd.

Address: No. 19-20, Anye Road, Yuanshan Street, Longgang District, Shenzhen, Guangdong, China (+86 0755-28608199)

Contact: meikee@meikeelighting.com

Website: http://www.meikeelighting.com